

Continental Outdoor Power Equipment Belt with Insta Power® Technology

Your Power Driver

Our Insta Power[®] belts are designed to deliver premium, long-life performance in demanding outdoor power equipment applications.



Features & Benefits

- High-strength aramid cord prevents stretch and improves reliability
- Wear-resistant fabric envelope resists shock loads and abrasion, including drying and cracking at high temperatures
- Internal rubber cushion provides excellent flexibility to handle high-stress drive applications
- > Static-conducting envelope provides added safety for the operator





Functional Part Numbering System

Insta Power # To	p Width Exam	ple Part #
83xxx 3/8 84xxx or 84xxxx 1/2 85xxx or 85xxxx 5/8	84 = 8" 32 = 2" 5 =	32"


The last three or four digits of the Insta Power® part number reference the outside circumference expressed in inches and tenths of an inch.

Industrial application belts should not be substituted for Insta Power® belts, as they may fail prematurely due to differences in material specs.

To learn more about Insta Power® belts, as well as the complete line of Continental outdoor power equipment products, contact your local sales representative or call 1-800-869-0435.

Specialty Application Belts

In addition to our **Insta Power**[®] line, we offer an extensive specialty belt line to fit a number of OEM applications. These belts provide form, fit and function for your OEM needs.

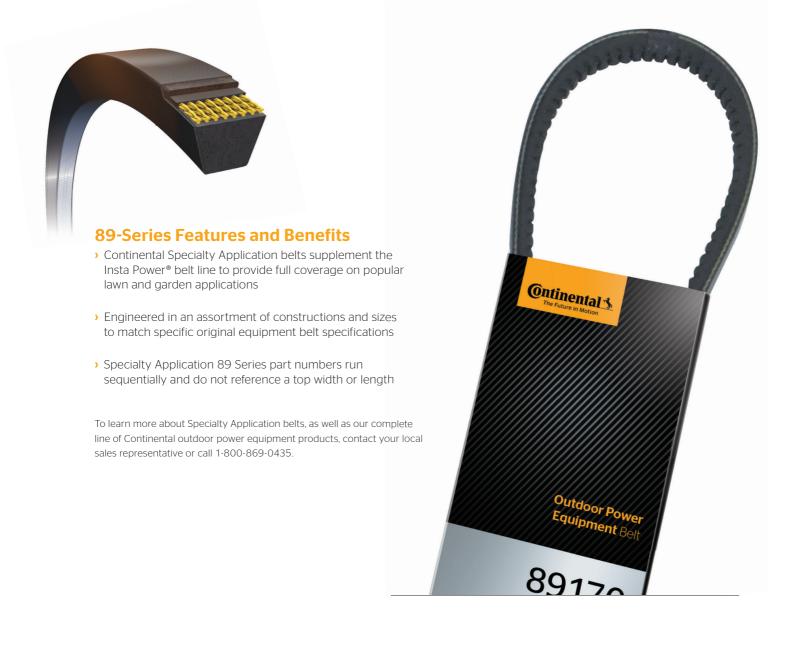

Legal Notice

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2018 ContiTech AG. All rights reserved. For complete information qo to: www.contitech.de/discl en



Contact Continental 703 S. Cleveland Massillon Road Fairlawn, OH 44333-3023 U.S.A.

U.S.A. and Canada

1-800-869-0453 FAX 1-800-228-3148

Canada

(French only) 1-888-275-4397 FAX 1-888-464-4397

Mexico

(Within Mexico) 01-800-439-7373

(Outside Mexico) +52-444-834-5803